

# Power & Energy Logger PEL 100 Series

Models PEL 102 & 103

All You Need For Power & Energy Logging



## Economical Compact Simple To Use

- ▶ Simple to use, single, dual-split and three phase (Y,  $\Delta$ ) power & energy loggers
- ▶ Designed to work in 1000V CAT III and 600V CAT IV environments and fits in many distribution panels
- ▶ Power measurements: VA, W and var
- ▶ Energy measurements: VAh, Wh (source, load) and varh (4 quadrants)
- ▶ DataView® Software for real-time communication with a PC data analysis and report generation with pre-defined or user defined templates
- ▶ Ethernet compatible
- ▶ Minimal programming required
- ▶ Bluetooth Class 1 wireless communication from up to 100 feet away
- ▶ Satisfies the requirements of NEC Code 220.87

**PRELIMINARY**



*Our products are backed by over 100 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.*

Contact: (732) 632-6400

[www.instrumentation2000.com](http://www.instrumentation2000.com)

 **AEMC**<sup>®</sup>  
INSTRUMENTS  
CHAUVIN ARNOUX GROUP  
(732) 632-6400

# PEL 100 Series®: MODELS PEL 102 & 103



Model PEL 102

Model PEL 103

The PEL 100 series is a low cost, simple to use, one-, two- (split-phase) and three-phase (Y,  $\Delta$ ) power/energy data logger. It is available in two models, a no display Model PEL102 or with a backlit digital display, Model PEL103.

This product is ideal for electricians, engineers and contractors doing work in the area of building and system monitoring and upgrades, as well as residential energy audits. All vital energy data is easily measured, recorded, analyzed and reports are generated with confidence and minimal configuration time and effort.

The PEL 100 series has many up-to-date features demanded by the present market conditions.

The design is laid out in such a way that it can be installed in a load center panel, including the current sensors, and still allow the door to close on most panels. The PEL 102 and 103 offer all the essential functions for data logging Power/Energy from most of the electrical power networks in use today. The PEL series energy loggers can measure three voltage and three current inputs and records these inputs, as well as Watts, VARS, VA and energy (kWh, kvarh and kVA). Power factor, displacement power factor, crest factor, frequency, neutral current and THD are calculated and recorded as well. Individual harmonic information as a % of fundamental out to the 50<sup>th</sup> harmonic is also recorded at the operator's choice. All variables are recorded and stored on a one second basis and on user selectable demand intervals from one to sixty minutes. Energy costs can be calculated and displayed quickly and easily by simply programming in the unit cost for a kilowatt hour. Data is stored on a removable SD card. Data can be retrieved by USB, Bluetooth and/or Ethernet (local or internet) connection, as well as transporting the SD card back to the download site.

The included, comprehensive DataView® software also provides the ability to view data from several hundred PEL units on a local network or over the internet providing the ability to evaluate energy usage on a department or facility basis anywhere in the world. Real-time data can be reviewed, as well as downloading stored results for analysis and report generation.

Configuration of the PEL 100 series instruments takes place through the DataView® software either locally or remotely. Most of the configured parameters are pre-set in the instrument keeping the user interface simple and straightforward and easy to complete in a few minutes. Current probes are automatically detected and calibrated when they are plugged into the unit. User selections include network type, demand interval, recording length, voltage and current ratios where necessary, recording duration (defined either by time and/or date) and communication method. Password protection can be initiated for Bluetooth and network communication to guard against unauthorized access and protection of data integrity.

The DataView® software provides the ability to review power, harmonic and RMS data in real time and to download recorded sessions for more extensive analysis and report generation. One second trend and demand interval trend graphs and tabular listings can be displayed and printed out. Energy costs can be calculated. Source and load graphs can be plotted. Individual phase and the sum of all phases can be evaluated. Once on screen, the user has access to a variety of analytical tools to analyze individual data points or sections of the recorded data without the frustration with having to deal with layers of button pushing to get to the information you need.

This simple to use yet comprehensive power and energy logger will be an invaluable asset to your energy monitoring and analysis.



The PEL series energy loggers can safely and easily be mounted to a wall, load center panel or equipment cabinet, facilitating the connection of the voltage and current hook-ups.

# FEATURES, NETWORKS & APPLICATIONS

## ▶ FEATURES

- ▶ Simple to use, single-, dual(split-phase) and three-phase (Y,  $\Delta$ ) power & energy loggers
- ▶ Provides all the necessary functions for Power/Energy data logging for most of the 50Hz, 60Hz, 400Hz and DC distribution systems worldwide offering numerous distribution set-ups
- ▶ Current measurements from 100mA up to 10,000A with MA193 flexible current sensors
- ▶ Power measurements: VA, W and var
- ▶ Energy measurements VAh, Wh (source/load indication) and varh (including quadrant indication)
- ▶ Record cost of energy usage
- ▶ Power Factor (PF), Cos ( $\varphi$ ), Tan ( $\Phi$ ) and DPF
- ▶ Crest Factor
- ▶ Total Harmonic Distortion (THD) for voltages and currents
- ▶ Harmonics from the fundamental signal up to the 50th order for 50/60Hz voltages and currents and 7th order for 400Hz
- ▶ Frequency measurements
- ▶ RMS and DC measurements @ 128 samples/cycle – each phase simultaneously
- ▶ Bright blue three line LCD on the Model PEL 103 (3 phases shown simultaneously)
- ▶ Storage of measured and calculated values on a SD-Card or SDHC-Card
- ▶ Automatic recognition of the connected current sensors/probes
- ▶ Configuration of current and voltage ratios to external PT and CT ratios
- ▶ 17 types of hook-ups for supported electrical distribution systems
- ▶ USB, LAN, and *Bluetooth* communication
- ▶ DataView® software for data download, viewing of measurements, real-time communication with a PC and report generation with pre-defined or custom templates

## ▶ NETWORKS SUPPORTED

- ▶ Single-Phase 2-Wire
- ▶ Single-Phase 3-Wire (Split-phase from a center tap transformer)

### Three-Phase 3-Wire Power Networks

- ▶ Three-phase 3-wire  $\Delta$  (with two current sensors)
- ▶ Three-phase 3-wire  $\Delta$  (with three current sensors)
- ▶ Three-phase 3-wire Open  $\Delta$  (with two current sensors)
- ▶ Three-phase 3-wire Open  $\Delta$  (with three current sensors)
- ▶ Three-phase 3-wire Y (with two current sensors)
- ▶ Three-phase 3-wire Y (with three current sensors)
- ▶ Three-phase 3-wire  $\Delta$  Balanced (with one current sensors)

### Three-phase 4-Wire Y Power Networks

- ▶ Three-phase 4-wire Y (with three current sensors)
- ▶ Three-phase 4-wire Y Balanced
- ▶ Three-phase 4-wire Y 2½ Element
- ▶ Three-phase 4-wire  $\Delta$
- ▶ Three-phase 4-wire Open  $\Delta$

### DC Power Networks

- ▶ DC 2-wire
- ▶ DC 3-wire
- ▶ DC 4-wire

## ▶ APPLICATIONS

- ▶ Verification of power distribution circuits
- ▶ Measurement and recording of power system quality (kW, VA, VAR)
- ▶ Energy metering (kVAh, VARh, kWh)
- ▶ In-plant troubleshooting of power distribution panels and individual machinery
- ▶ Monitor phase unbalances
- ▶ Determine harmonic problems originating from source or load
- ▶ Remote monitoring
- ▶ Monitor sub-metering
- ▶ Baseline studies for system upgrades in high-rise and office buildings
- ▶ Determine cost of energy usage




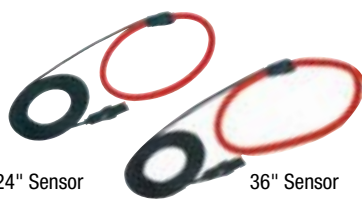



# SPECIFICATIONS


GENERAL			
Sampling Frequency	128 samples per cycle; 50/60Hz (16 samples/cycle 400Hz)		
Data Storage Rate	1 per second		
Demand Period Storage Rate	User selectable (1, 2, 3, 4, 5, 6, 10, 12, 15, 20, 30 and 60 minutes)		
Recorded Parameters (Single- and Poly-Phase)	V, I, W, VA, var, PF, Tan, Wh, Vah, varh, THD (V and I), Individual harmonics (from 1 through 50 per phase); Crest Factor (CF), Cos $\phi$ / DPF,		
Event Log	Tracks and records status changes and error messages along with recorded data		
Front Panel Indicator LEDs	Bluetooth active, recording in progress, phase connection reversal, overload, battery charging and SD Card status		
Storage Capacity	2GB SD card (included) is used for storage. SD cards (up to 2GB); SDHC cards (4 to 32GB) formatted FAT32 are supported		
INPUTS			
Voltage	3 voltage input channels via 4mm safety banana jacks		
Current	3 current input channels via custom 4 pin jacks that accept AEMC® probes and sensors shown on page 5		
ELECTRICAL			
VOLTAGE MEASUREMENT	RANGE	RESOLUTION	* ACCURACY (% of Reading)
50/60Hz	42.5 to 69Hz	–	±0.1Hz
Single-Phase RMS Voltages	100 to 1000 rms	0.1V	±0.2% Rdg ± 0.2V
Phase-to-Phase RMS Voltages	100 to 2000Vrms	0.1 to 1V	±0.2% Rdg ± 0.4V
400Hz	340 to 460Hz	–	–
Single-Phase RMS Voltages	100 to 600Vrms	0.1V	±1% Rdg ± 1V
Phase-to-Phase RMS Voltages	200 to 1200Vrms	0.1 to 1V	±1% Rdg ± 1V
DC	100 to 1000V	0.1V	±1% Rdg ± 3V (typical)
PT Ratios	Programmable from 50V to 65,0000V (primary and secondary)	0.01V to 0.1V	–
CURRENT MEASUREMENT			
Current Probe: MiniFlex® Sensor MA193	100mA to 100Arms	1 to 100mA	±1% ± 50mA
For further specifications and other compatible current probes, see chart on page 5	20 to 400Arms	10 to 100mA	±1% ± 0.2A
	100 to 2000Arms	0.1 to 1A	±1% ± 1A
	500 to 10,000Arms	0.1 to 1A	±1%
CT Ratios	Programmable from 1:1 to 25,000:1 (probe dependent)		
POWER MEASUREMENTS			
Active Power (P)*	-2 to 2GW	0.001W	±0.5% Rdg ± 0.005% Pnom
Reactive Power (Q)*	-2 to 2Gvar	0.001var	±1% Rdg ± 0.01% Qnom
Apparent Power (S)*	0 to 2GVA	0.001VA	±0.5% Rdg ± 0.005% Snom
Power Factor	-1 to +1	0.001	± 0.05
Tangent $\phi$ (active/reactive power ratio)	-3.2 to +3.2	0.001	± 0.02
ENERGY MEASUREMENTS			
Active Energy (EP)	0 to 4EWh	1Wh	±0.5% Rdg
Reactive Energy(EQ)	0 to 4EWh	1varh	±2% Rdg
Apparent Energy (ES)	0 to 4EWh	1Vah	±0.5% Rdg
HARMONICS			
THD	± 655%		
Individual Harmonics	1 to 50 displayed in percentage; 1 to 7 at 400Hz		
External Supply	110V/250V (10%) @ 50/60Hz; 400Hz		
Back-Up Power Source / Charge Time	Rechargeable 8.4V NiMH battery pack / Approximately 5 hours		
Battery Life	Provides up to 30 minute ride through upon power loss		
MECHANICAL			
Communication Ports	USB 2.0, Ethernet (RJ45), Wireless Bluetooth Class 1		
Dimensions/Weight	10.08 x 4.92 x 1.46" (256 x 125 x 37mm) / <1kg		
Case / Index of Protection	Double insulated, rubber over-molded, polycarbonate UL94 V1 rated / IP54 non operating		
Mounting	Embedded magnets on back side, keyhole slot on back side		
Security	Kensington anti-theft system		
DISPLAY			
Display Type	2.63 x 2.16" (67 x 55mm), four line, monochrome, backlit LCD with adjustable brightness and contrast		
ENVIRONMENTAL			
Operating Temperature / Relative Humidity	32° to 122°F (0° to 50°C) / up to 85%		
Storage Temperature	-4° to 122°F (-20° to 50°C) with batteries; -4° to 158°F (-20° to 70°C without batteries)		
SAFETY			
Safety Rating / CE Rating	Complies with IEC 61010-1:Ed3, and IEC 61010-2-030:Ed1 for 1000V CAT III/ 600V CAT IV, Pollution Degree 2 / Yes		

\* Maximum value is current probe dependent

# PROBES & SENSORS


A complete family of current measurement probes to meet most AC (or DC) measurement applications up to 10,000Arms.

Sensor Type	I nominal	RMS or DC Current	Accuracy	Typical Error on $\phi$ at 50/60Hz	Maximum Error on $\phi$ at 50/60Hz	Typical Error on $\phi$ at 400Hz	Max Conductor Size
<b>MiniFlex® MA193</b> <i>(Included with instrument)</i>  10" Sensor	100AAc	100mA to 120A	$\pm 1\% \pm 50\text{mA}$	0°	$\pm 0.5^\circ$	-0.5°	2.75" (70mm)
	400AAc	20 to 500A	$\pm 1\% \pm 0.2\text{A}$	0°	$\pm 0.5^\circ$	-0.5°	
	2000AAc	100 to 2400A	$\pm 1\% \pm 1\text{A}$	0°	$\pm 0.5^\circ$	-0.5°	
	10,000AAc	500 to 12000A	$\pm 1\%$	0°	$\pm 0.5^\circ$	-0.5°	
<b>MR193</b>  1000Adc	50 to 100A	$\pm 1.5\% \pm 1\text{A}$	-1°	$\pm 2.5^\circ$	-4.5° @ 100A	1.6" (41mm)	
	100 to 800A	$\pm 2.5\%$	-0.7°	$\pm 2^\circ$			
	800 to 1200A	$\pm 4\%$					
<b>SR193</b>  1000AAc	50 to 100A	$\pm 0.5\%$	+0.25°	$\pm 1^\circ$	+0.1°@ 1000A	2.05" (52mm)	
	100 to 1200A	$\pm 0.3\%$	+0.2°	$\pm 0.7^\circ$			
<b>AmpFlex® 193</b>  24" Sensor      36" Sensor	100AAc	5 to 120A	$\pm 1\% \pm 50\text{mA}$	0°	$\pm 0.5^\circ$	-0.5°	7.64" (190mm)
	400AAc	20 to 500A	$\pm 1\% \pm 0.2\text{A}$	0°	$\pm 0.5^\circ$	-0.5°	
	2000AAc	100 to 2400A	$\pm 1\% \pm 15\text{A}$	0°	$\pm 0.5^\circ$	-0.5°	11.46" (290mm)
	10,000AAc	500 to 12000A	$\pm 1\%$	0°	$\pm 0.5^\circ$	-0.5°	
<b>MN93</b>  200AAc	5 to 40A	$\pm 2.5\% \pm 1\text{A}$	+2°	$\pm 5^\circ$	-1.5°@ 40A	0.78" (20mm)	
	40 to 100A	$\pm 2\% \pm 1\text{A}$	+1.2°	$\pm 3^\circ$	-0.8°@ 100A		
	100 to 240A	$\pm 1\% \pm 1\text{A}$	+0.8°	$\pm 2.5^\circ$	-1°@ 200A		
<b>MN193</b>  100A 5A	100AAc	5 to 120A	$\pm 1\%$	+0.75°	$\pm 2.5^\circ$	-0.5°@100A	0.78" (20mm)
	5AAc	250mA to 6A	$\pm 1\%$	+1.7°	$\pm 5^\circ$	-0.5°@ 5A	
<b>SL261 *</b>  10A 100A	100AAc/dc	5 to 40A	$\pm 4\% \pm 50\text{mA}$	-	$\pm 1^\circ$	-	0.46" (11.8mm)
		40 to 100A	$\pm 15\%$	-	$\pm 1^\circ$	-	
	10AAc/dc	50mA to 10A	$\pm 3\% \pm 50\text{mA}$	-	$\pm 1.5^\circ$	-	

\*  AC/DC Current Probe BNC Adapter for Model SL261 only  
Catalog #2140.40

# MODEL PEL 103 LCD DISPLAY

## Key Features of the PEL 103 Display

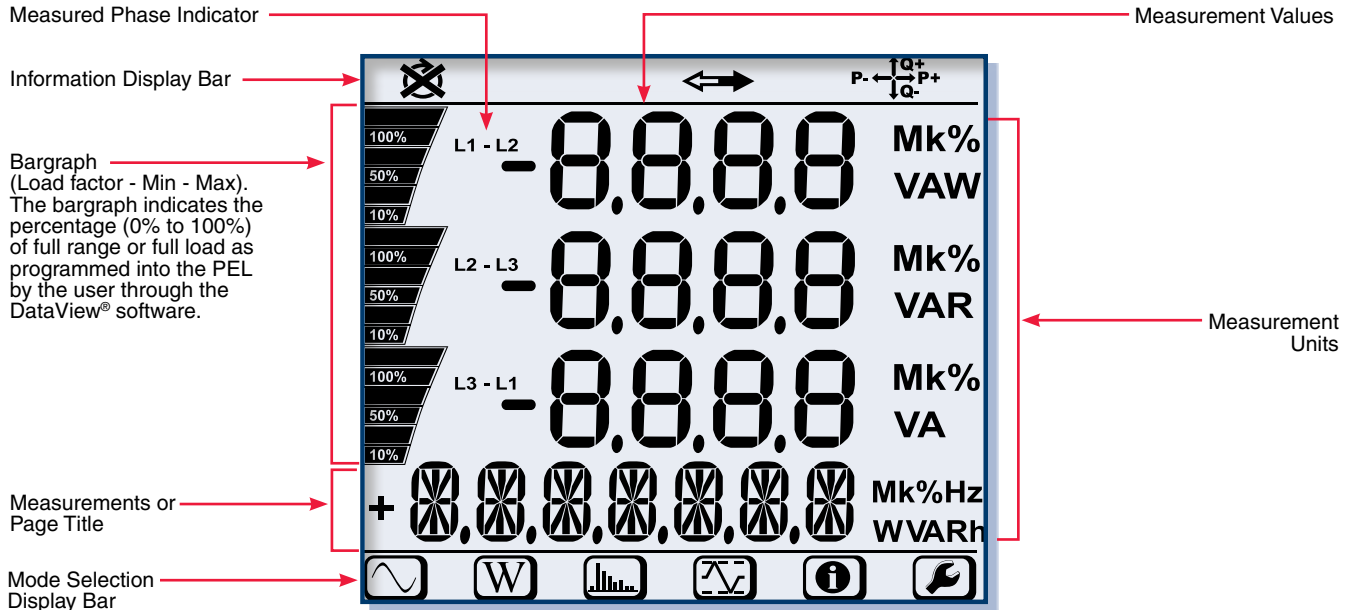

## Top and Bottom Display Bars Indicate the Following

ICON	DESCRIPTION
	Phase Sequence reversal indicator or missing phase (displayed in 3-Phase distribution systems)
	Data available for recording (non-display indicates possible internal problem)
	Power Quadrant Indication
	Measurement Mode (Real Time values)
	Power and Energy Mode
	Harmonics Mode
	Min/Max Mode
	Information Mode
	Not used




The backlit display on the Model PEL103 can be read in dark areas showing the real-time measurements.

# FUNCTIONAL DISPLAYS

The PEL 103 display provides real-time information for all the measures and calculated values that are recorded. The left/right navigation button scrolls through the display modes while the up/down navigation button scrolls through the available real-time measurements for the selected display mode.




## Harmonic Mode

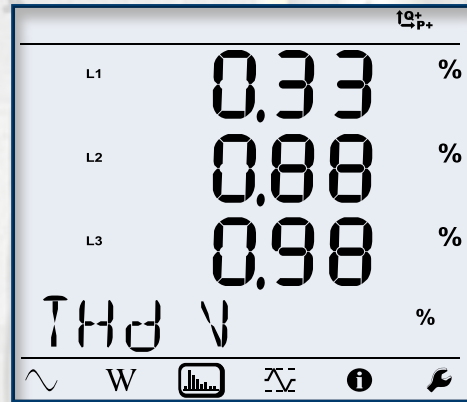

Total Harmonic Distortion (THD) can be displayed by phase or phase to phase. Neutral current THD can also be displayed.




## Measurement Mode

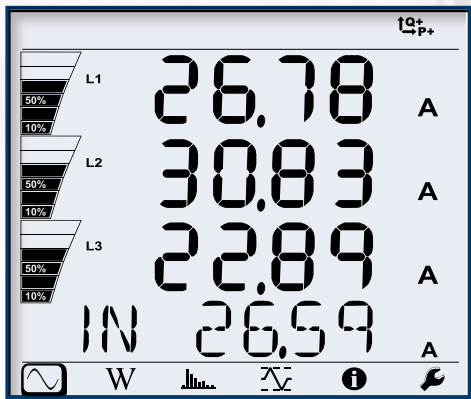

Real-time updates are displayed for voltage, current, power, frequency, power factor and tangent.




## Min/Max Mode

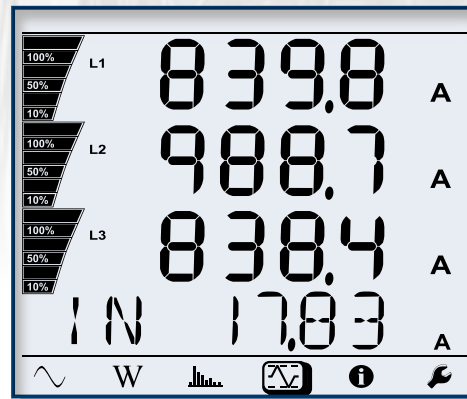

Min/Max values for voltage, current (including neutral current), power and harmonics.




## Energy Mode

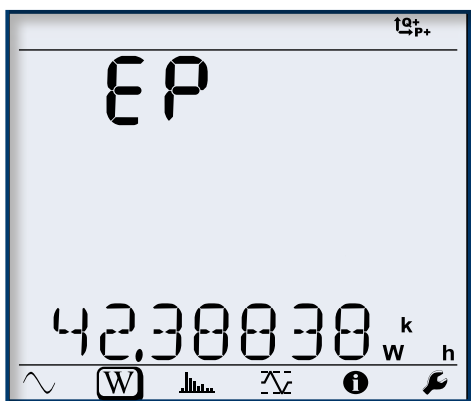

Real and apparent energy can be displayed along with an indicator identifying whether the energy is used by the load or supplied back to the source. Reactive energy can also be displayed with source/load, capacitive or inductive properties indicated.



## Information Mode

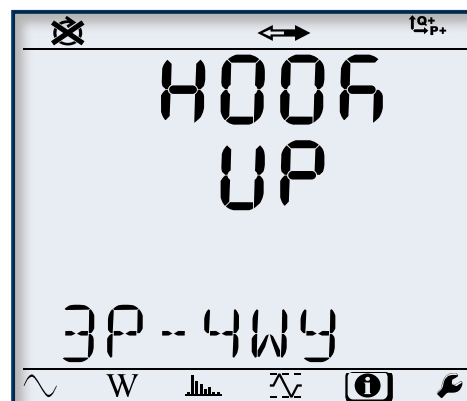

In this display the network hook-up, PT and CT primary and secondary values can be displayed as well as the IP address (if connected to the Ethernet), Software and Firmware version and serial number.

# DataView® CONTROL PANEL


DataView® software provides a convenient way to configure and control power and energy tests from a computer. Through the use of clear and easy-to-use tabbed dialog boxes, all PEL 100 Series functions can be configured and tests can be initiated. Results can be displayed in real-time and stored on a PC. Reports may be printed along with the operator's comments and analysis.




Basic information regarding Auto Power Off, instrument name and location, display brightness and contrast (Model PEL103), setting of the real-time clock and SD card formatting is easily accomplished from the General tab.



The Communication tab provides information about the various communication mediums supported by the instrument with clear and easy setup of all functions from one dialog box.

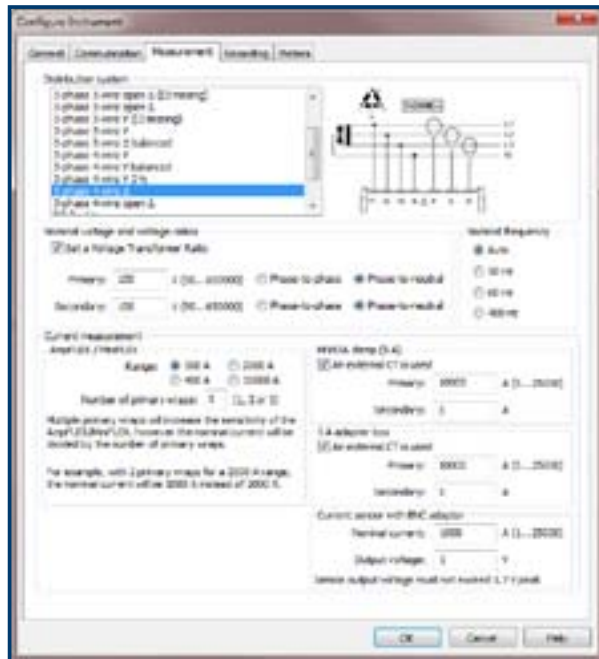


The Measurement tab specifies the electrical distribution system, voltage ratios, nominal frequency and current probe options and ratios.

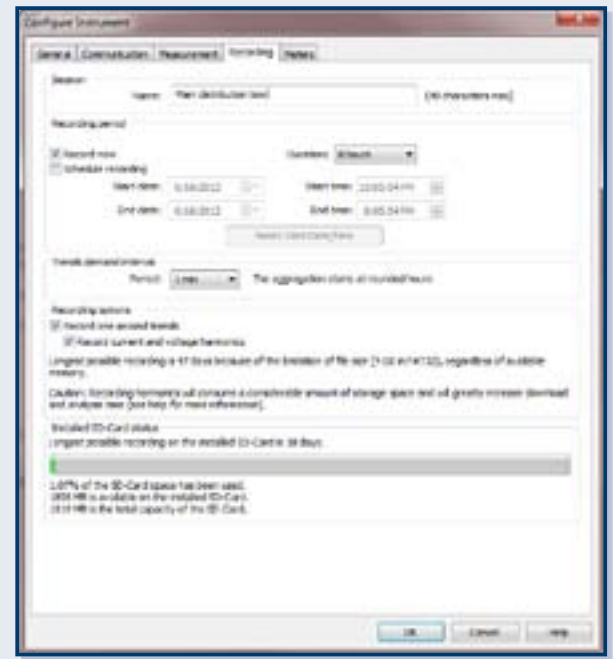

In the Recording tab, configure the instrument to measure (and record) over a user selectable recording period from a few hours to a month or longer. Select demand intervals from one to sixty minutes and view available memory for data storage.

# DataView® DATA ANALYSIS & REPORTING

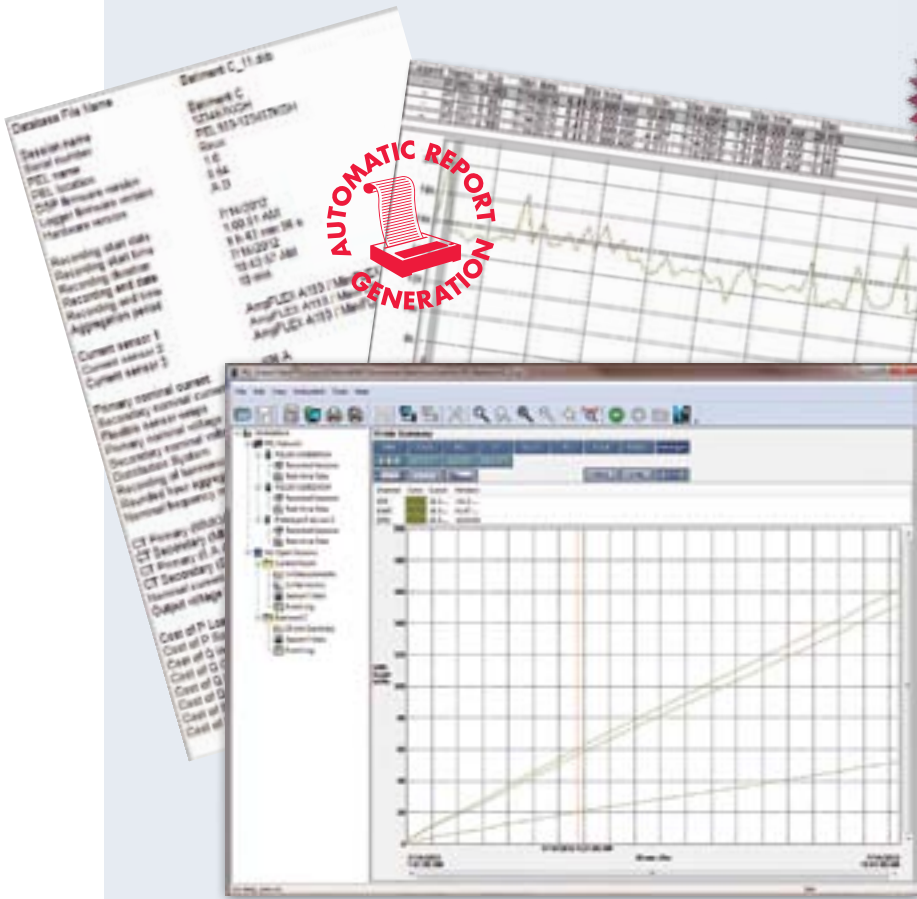

**NEW & IMPROVED SOFTWARE**



DataView® is included with Models PEL 102 and 103 on a USB stick.


## Configure all functions of the PEL 100 Series Loggers with DataView®

- ▶ Display real-time data on a PC
- ▶ Configure all PEL 100 Series functions and parameters from your PC
- ▶ Poll multiple energy loggers from your PC
- ▶ Customize views, templates and reports to meet specific needs
- ▶ Export data to spreadsheets
- ▶ Zoom in and out and pan through sections of the graph to analyze the data
- ▶ Display trend graphs, harmonic spectrums, text summaries and event logs
- ▶ Print reports using predefined or user designed custom templates
- ▶ Selectively review values, phases or total network recordings
- ▶ Keep track of accumulated energy and cost over time
- ▶ Create user-specific cover sheets for reports that identify specific data that includes operator, tests site and narrative associated with the data

Reports can be displayed on a PC and printed. Each report includes all test results in a tabular and graphic format, as well as operator and test site information. Comments typed by the operator will also be included.

In the PEL control panel you will find all the necessary tools and selection buttons to review recorded data as trend plots or tabular lists. Also logger selection, when multiple loggers are detected, is accomplished in the control panel.

## Typical Control Panel Trend View

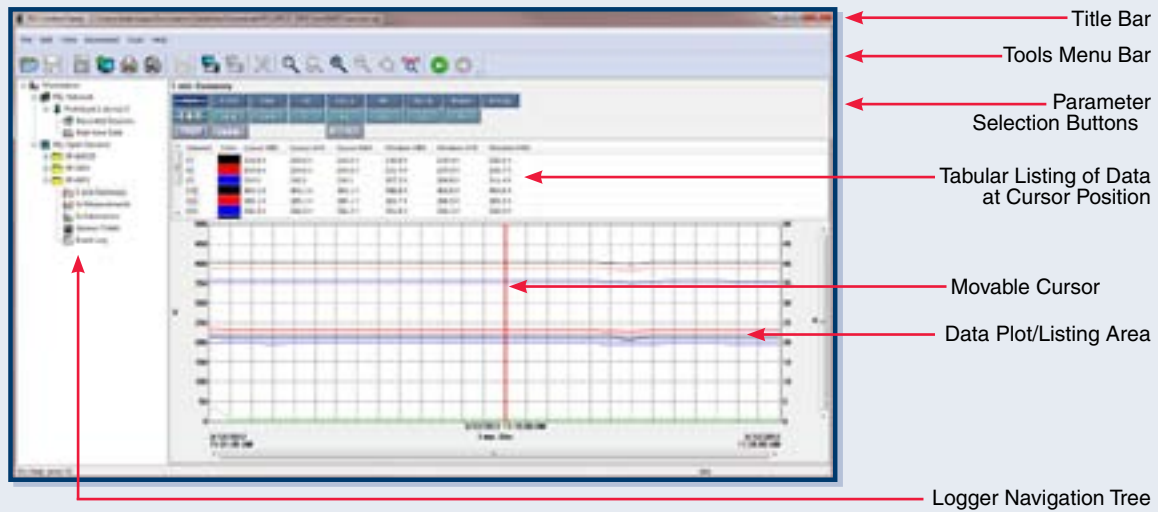

# CASE FEATURES

## PANEL FEATURES



## MOUNTING

The PEL 102/103 can also be mounted to a flat vertical surface using the MultiFix multi-purpose mounting accessory.

*The PEL 102/103 can be mounted on a door or other object using the multifix mounting attachment, included.*



*The PEL 102/103 is equipped with four powerful magnets for mounting the instrument to a metallic surface.*



# MODEL PACKAGING

## Assurance Guaranteed

The PEL 102 and 103 power and energy loggers come complete with all the required components and accessories to conduct your power and energy recording, data analysis and report generation. No worrying or second guessing if you purchased everything to get the job done. It all comes neatly packaged in a convenient canvas carrying bag with multiple pockets to store all the components with easy access when needed.

## INCLUDED WITH EACH MODEL

(1) Small Classic Tool Bag  
Cat. #2133.72

(1) Multiflex Mounting System  
Cat. #5000.44

(1) of the following:  
Power Energy Logger Model PEL 102  
Power Energy Logger Model PEL 103  
Cat. #2136.41 / 2136.42

(4) Black Test Leads and Alligator Clips  
Cat. #2137.76

(1) USB-SD-Card Adapter  
Cat. #5000.45

(3) MiniFlex® Model MA193-10-BK  
Cat. #2140.48

(1) Power Cord  
Cat. #5000.14

(1) USB Stick with DataView®  
and User Manuals

(1) 5ft USB Cable  
Cat. #2140.46

(12) Color-coded ID Markers  
Cat. #2140.45

# ORDERING INFORMATION

*Model PEL 102 is a cost effective energy monitoring solution that can be mounted in unattended areas allowing real-time and recorded data to be reviewed remotely via Ethernet or Bluetooth communication.*



DESCRIPTION	CATALOG NO.
Models PEL 102 and 103 include: Small Classic Tool Bag, Three MiniFlex® MA193-10-BK Sensors, 5 ft USB Cable, Four Black Test Leads and Alligator Clips, Power Cord, 12 Color-coded ID Markers, Multifix Mounting System, Safety Card for the PEL, Sensor Compliance Sheet, 2 GB SD-Card with USB-SD-Card Reader, USB Stick with DataView®, Quick Start User Guide and User Manual.	
Power & Energy Logger Model PEL 102 (no LCD) .....	<b>Cat. #2137.51</b>
Power & Energy Logger Model PEL 103 (includes LCD) .....	<b>Cat. #2137.52</b>
<b>Accessories and Replacement Parts (Optional)</b>	
AC/DC Current Probe Model MR193-BK (1000A <sub>AC</sub> /1400A <sub>DC</sub> ) .....	<b>Cat. #2140.28</b>
AC Current Probe Model MN93-BK (200A) .....	<b>Cat. #2140.32</b>
AC Current Probe Model SR193-BK (1200A) .....	<b>Cat. #2140.33</b>
AmpFlex® Sensor 24" Model 193-24-BK (6500A) (black connector) .....	<b>Cat. #2140.34</b>
AmpFlex® Sensor 36" Model 193-36-BK (6500A) (black connector) .....	<b>Cat. #2140.35</b>
AC Current Probe Model MN193-BK (5A/100A) (black connector) .....	<b>Cat. #2140.36</b>
MiniFlex® Current Sensor 10" Model MA193-10-BK (black connector) .....	<b>Cat. #2140.48</b>
AC/DC Current Probe Model SL261 (10A-100mV/A, 100A-10mV/A, BNC) .....	<b>Cat. #1201.51</b>
Replacement - Small classic tool bag .....	<b>Cat. #2133.72</b>
Replacement - Battery (custom factory replacement NiMH AAA 8.4V) .....	<b>Cat. #2137.75</b>
Replacement - Set of 4 black test leads, 10 ft (3m), 4 black alligator clips and 12 color-coded ID markers .....	<b>Cat. #2137.76</b>
Replacement - Set of 12 color-coded input ID markers .....	<b>Cat. #2140.45</b>
Replacement - USB cable A/B, 5 ft (1.5m) .....	<b>Cat. #2140.46</b>
Replacement - Power cord, 5 ft (1.5m) 115 V .....	<b>Cat. #5000.14</b>
Replacement - MultiFix (universal mounting system) .....	<b>Cat. #5000.44</b>
Replacement - USB SD-card adapter .....	<b>Cat. #5000.45</b>
USB cable, A/B 10 ft (3m) .....	<b>Cat. #2136.80</b>
BNC adapter for SL261 current probe .....	<b>Cat. #2140.40</b>
Anti-theft Kensington Laptop Security Cable (available in most office supply stores) .....	N/A

