

METRAHIT 30M

Precision Digital Multimeter

3-348-979-03
8/11.12

- **Precision multimeter** (V, mA, Ω , Hz, °C/°F) and data logger
- **1,200,000 digit display range**
High resolution for:
DC/AC+DC voltage: 100 nV/1 μ V
DC and AC+DC Current: 100 pA
- **TRMS AC+DC**
- **Milliohmmeter with 2 and 4-wire connection**
Resolution: 0.1 m Ω
- **Precision temperature meter**, °C and °F
for Pt100/Pt1000 sensors with 2/4-wire connection,
Resolution: 0.01 °C/°F
for J and K thermocouples, resolution: 0.1 °C/°F,
internal or external reference junction can be selected
- **Large capacity measurement value memory:** 128 kB
- **Windows software** for remote control, parameter settings,
processing and graphic representation of measurement
values via RS 232 interface as accessory
- **DAkKS calibration certificate included**


QUALITY MANAGEMENT SYSTEM



DQS certified per
DIN EN ISO 9001



Deutsche
Akkreditierungsstelle
D-K-15080-01-01
DAkKS Calibration Certificate as Standard Feature

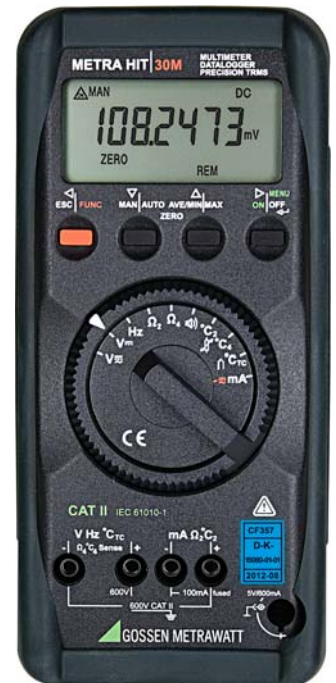

Applications

The 30M multimeter is a high performance, precision measuring instrument for R&D labs, industrial applications, universities, government authorities, testing stations, manufacturing and QA. With a display range of 1,200,000, as well as exceptional accuracy and long-term stability, it fulfills all of the demands of calibration and R&D labs. Battery operation allows for mobile use of the instrument for demanding maintenance work and calibration tasks. An optional mains power pack can be utilized for stationary, long-term operation.

Features

TRMS Measurement for Distorted Waveshapes

The utilized measuring method allows for TRMS measurements for up to 100 kHz at crest factors of up to 10, independent of the waveshape.

Sampling Rate

The sampling rate determines the interval at which the respective measurement value is saved to memory. Depending upon measured quantity and resolution, the interval can be set within a range of 0.01 s to 60 s.

Automatic and Manual Measuring Range Selection

The desired measured quantity is selected with the rotary switch. The measuring range is automatically adapted to the measured quantity. The measuring range can also be selected manually.

Averaging Filter

A digital filter (1/2/4/8/16 measurement values) is used to smooth noisy measurement signals.

Storing MIN-MAX Values to Memory

In addition to displaying the current measurement value, the minimum or maximum value can be continuously updated and stored to memory at the selected sampling rate.

Continuity Testing

Continuity testing allows for the detection of short-circuits and interruptions. An acoustic signal can be generated in addition to a visual display.

Overload Protection

The instrument is protected against overloading in all measuring functions. All current measuring ranges are equipped with a self-resetting, electronic fuse.

Battery Saver Circuit

The instrument is shut down automatically if the measurement value remains unchanged for approximately 10 minutes, and if none of the operating elements have been activated during this time. Automatic shut-down can be deactivated.

Protective Cover for Rugged Use

A soft rubber cover with tilting stand and probe holder protects the instrument from damage due to impacts or drops. The rubber material provides the instrument with a secure stance, even if it has been set up on a vibrating surface.

METRAHIT 30M

Precision Digital Multimeter

Memory Mode

The instrument is equipped with a 128 kB measurement value memory with backup battery. The memory can be laid out in 1 to 15 blocks. New values can be written to memory, even after completion of a given measurement without loss of data, until the maximum capacity of 30,000 measurement value has been used up. The data can be stored to intermediate memory, or uploaded directly to a PC. The system records measurement values in relative time. Use as a real-time data logger is not possible. Depending upon the measured quantity, the interval can be set in

steps of 10 ms, 100 ms, 1 s, 10 s and 60 s. Individual measurement values can also be saved to memory by pressing a key.

The contents of the memory can be read out with the help of METRAWin10/METRAHit analysis software and a PC which has been connected to the multimeter via the BD232 IR adapter.

Infrared Data Interface

The measuring instrument includes a serial, duplex data interface for remote control and transmission of data via infrared light.

Characteristic Values

| Meas. Function | Measuring Range | Resolution at Measuring Range Upper Limit | | | Input Impedance | | Inherent Deviation at Max. Resolution under Reference Conditions $\pm(\dots\% \text{ rdg.} + \% \text{ R})$ | | Frequency Range in Hz | Overload Capacity ³⁾ | |
|---|--|---|------------------------|----------------------|-----------------------------|---------------------------------------|--|---|---|---------------------------------|------------|
| | | 1,200,000 ¹⁾ | 120,000 ¹⁾ | 12,000 ¹⁾ | — | \approx | — | \approx ^{4) 5)} | | Value | Duration |
| V | 100 mV | 0.1 μV | 1 μV | 10 μV | > 1 G Ω | > 1 G Ω // < 50 pF | 0.005 + 0.0006 ⁶⁾ | 0.08 + 0.06 ⁷⁾ 0.1 + 0.1 | 45 ... 65 10 ... 1 k | 600 V eff sine | continuous |
| | 1 V | 1 μV | 10 μV | 100 μV | > 1 G Ω | 10 M Ω // < 50 pF | 0.0030 + 0.0004 | 5 + 0.5 0.08 + 0.06 ⁷⁾ 0.1 + 0.1 | 1 k ... 5 k 45 ... 65 15 ... 1 k | | |
| | 10 V | 10 μV | 100 μV | 1 mV | 10 M Ω | 10 M Ω // < 50 pF | 0.0030 + 0.0004 | 0.2 + 0.1 5 + 0.5 | 10 ... 10 k 10 k ... 50 k | | |
| | 100 V | 100 μV | 1 mV | 10 mV | 10 M Ω | 10 M Ω // < 50 pF | 0.0030 + 0.0006 | 0.1 + 0.1 3 + 0.1 | 50 k ... 100 k | | |
| | 600 V ²⁾ | 1 mV | 10 mV | 100 mV | 10 M Ω | 10 M Ω // < 50 pF | 0.0040 + 0.0010 | 0.08 + 0.06 0.2 + 0.1 3 + 0.1 | 45 ... 65 10 ... 1 k 1 k ... 10 k | | |
| Approx. Voltage Drop at Upper R Limit | | | | | — | \approx | — | \approx ^{4) 5)} | | | |
| mA | 100 μA | 100 pA | 1 nA | 10 nA | 150 mV | 150 mV | 0.02 + 0.002 | 0.08 + 0.06 0.1 + 0.1 0.2 + 0.1 | 45 ... 65 10 ... 1 k 1 k ... 5 k | 0.18 A | continuous |
| | 1 mA | 1 nA | 10 nA | 100 nA | 1.5 V | 1.5 V | | | | | |
| | 10 mA | 10 nA | 100 nA | 1 μA | 150 mV | 150 mV | | | | | |
| | 100 mA | 100 nA | 1 μA | 10 μA | 1.5 V | 1.5 V | | | | | |
| | | | | | Open-Circuit Voltage | Meas. Current at Upper R Limit | $\pm(\dots\% \text{ rdg.} + \% \text{ R})$ | | | | |
| Ω | 100 Ω | 0.1 m Ω | 1 m Ω | 10 m Ω | 3 V | 1 mA | 0.005 + 0.001 ⁶⁾ | 600 V eff sine | 10 min. | | |
| | 1 k Ω | 1 m Ω | 10 m Ω | 100 m Ω | 3 V | 1 mA | 0.005 + 0.001 ⁶⁾ | | | | |
| | 10 k Ω | 10 m Ω | 100 m Ω | 1 Ω | 3 V | 100 μA | 0.005 + 0.001 | | | | |
| | 100 k Ω | 0.1 Ω | 1 Ω | 10 Ω | 3 V | 10 μA | 0.005 + 0.001 | | | | |
| | 1 M Ω | 1 Ω | 10 Ω | 100 Ω | 3 V | 1 μA | 0.05 + 0.002 | | | | |
| Ω \Rightarrow | 100 Ω | | | 10 m Ω | 3 V | 1 mA | 0.5 + 0.02 0.05 + 0.01 | | | | |
| Hz | 1 Hz ²⁾ ... | 0.000 001 Hz | | | | | 0.05% rdg. | 600 V | continuous | | |
| | 100 kHz | 0.1 Hz | | | | | | | | | |
| Sensor | | | | | | | | | | | |
| $^{\circ}\text{C}/^{\circ}\text{F}$ | -200.00 ... +850.00 $^{\circ}\text{C}$ | 0.01 $^{\circ}\text{C}$ | 0.1 $^{\circ}\text{C}$ | 1 $^{\circ}\text{C}$ | Pt 100 / Pt 1000 | | $\pm(0.05\% \text{ rdg.} + 0.08 \text{ K})$ ⁸⁾ | 600 V eff sine | 10 min. | | |
| | -210.0 ... +1200.0 $^{\circ}\text{C}$ | 0.1 $^{\circ}\text{C}$ | 0.1 $^{\circ}\text{C}$ | 1 $^{\circ}\text{C}$ | J (Fe-CuNi) | | $\pm(0.7\% \text{ rdg.} + 0.3 \text{ K})$ ⁹⁾ | 600 V eff sine | | | |
| | -270.0 ... +1372.0 $^{\circ}\text{C}$ | | | | K (NiCr-Ni) | | | | | | |

¹⁾ Display places: 6½ for DC and Ω , 5½ for AC.
Resolution is adjustable for the storage and transmission of measurement values.
²⁾ Smallest measurable frequency with sinusoidal measuring signal, combined period and frequency measurement
³⁾ At 0 to +40 $^{\circ}\text{C}$
⁴⁾ As of 10% of the measuring range. See page 3 for influences.
⁵⁾ DC components: max. 10% of measurement value

⁶⁾ ZERO appears at the display for active "zero balancing" function.
⁷⁾ Range 100mV \approx : $U_E = 10 \dots 30 \text{ mV}_{\text{eff}}$ + additional error of 0.5% R
1 V \approx : $U_E = 0.1 \dots 0.3 \text{ V}_{\text{eff}}$ + additional error of 0.3% R
⁸⁾ Plus sensor deviation
⁹⁾ Plus sensor deviation, internal or external reference junction can be selected

Key: R = measuring range, rdg. = reading (measurement value)

METRAHIT 30M

Precision Digital Multimeter

Influence Variables and Influence Effects

| Influence Variable | Influence Range | Measured Quantity / Measuring Range ¹⁾ | Influence Effect ppm/K |
|--------------------|---------------------------------------|---|------------------------|
| Temperature | 0° C ... +21° C and +25° C ... +40° C | V \equiv | 8 |
| | | V \sim | 100 |
| | | mA \equiv | 20 |
| | | mA \approx | 100 |
| | | 100 Ω ... 100 k Ω | 8 |
| | | 1 M Ω | 15 |
| | | 10 M Ω | 100 |
| | | Hz | 50 |
| °C | 15 | | |

| Influence Variable | Influence Range | Measured Quantity / Measuring Range ¹⁾ | Influence Effect ³⁾ |
|-----------------------------|---|---|---|
| Measured Quantity Waveshape | Crest Factor CF 1 ... 3 > 3 ... 5 10 | V \sim , mA \sim | $\pm 0.2\%$ R |
| | | | $\pm 0.5\%$ R |
| | | | $\pm 2\%$ R |
| | | | The allowable crest factor (CF) for the periodic quantity to be measured is dependent upon the displayed value: |
| | | | |

| Influence Variable | Influence Range | Measured Quantity / Measuring Range ¹⁾ | Influence Effect |
|--------------------|-----------------------------|---|------------------------|
| Relative Humidity | 75% 3 days device off | V, mA, Ω , Hz, °C | 1 x inherent deviation |

| Influence Variable | Influence Range | Measuring Range | Damping \pm dB |
|----------------------------------|---|------------------------|------------------|
| Common-Mode Interference Voltage | interference qty. max. 1000 V \sim 50 Hz, 60 Hz sine | V \equiv | > 90 dB |
| | | 100 mV ... 10 V \sim | > 80 dB |
| | | 100 V \sim | > 70 dB |
| | | 600 V \sim | > 60 dB |
| Series-Mode Interference Voltage | interference qty. V \sim , respective measuring range nominal value, max. 1000 V \sim , 50 Hz, 60 Hz sine | V \equiv | > 60 dB |
| | | V \sim | > 60 dB |

1) With zero balancing
2) Inherent deviation values valid as of a display value of 10% of the measuring range
3) Except for sinusoidal waveshape

Reference Conditions

| | |
|---------------------|------------------|
| Ambient Temperature | +23° C \pm 2 K |
| Relative Humidity | 40 ... 60% |
| Measured Quantity | |
| Frequency | 45 ... 65 Hz |
| Measured Quantity | |
| Waveshape | sine |
| Battery Voltage | 3 V \pm 0.1 V |
| Power Pack Voltage | 5 V \pm 0.2 V |

Response Time

After Manual Range Selection at Maximum Resolution

| Measured Quantity / Measuring Range | Response Time | Measured Quantity Step Function |
|--|---------------|--|
| V \equiv , V \sim , mA \equiv , mA \sim | max. 2 s | from 0 to 80% of measuring range upper limit |
| 100 Ω ... 1 M Ω | max. 2 s | from ∞ to 50% of measuring range upper limit |
| Continuity | < 30 ms | |
| °C (Pt100) | max. 2 s | |
| > 10 Hz | max. 2 s | from 0 to 50% of measuring range upper limit |

Measuring Cycle

| Measuring Function | Interval Depending Upon Resolution | | |
|--------------------------|------------------------------------|---------|--------|
| | 1 200 000 | 120 000 | 12 000 |
| V \equiv , mA \equiv | 1 s | 0.1 s | 0.01 s |
| V \sim , mA \sim | — | 0.1 s | 0.01 s |
| Ω / °C | 1 s | 0.1 s | 0.01 s |
| °C (K, J) | 1 s | 0.1 s | 0.01 s |
| Hz | 1 s (\leq 2 s at 1 Hz) | — | — |

Display

LCD field (65 mm x 30 mm) with digital display, including display of unit of measure, current type and various special functions.

| | |
|----------------------|---|
| Display/Char. Height | 7 Segment / 12 mm |
| Number of Places | 6½ |
| Overload Display | "OL" is displayed as of 1,250,000 |
| Polarity Display | "—" sign is displayed when plus pole is connected to "–V" |

Display Refresh Rate

| | |
|-------------------------|--------------------------|
| V, mA, Ω , °C/°F | once per second |
| Hz | 1 to 0.5 time per second |

METRAHIT 30M

Precision Digital Multimeter

Power Supply

Battery 2 ea. 1.5 V mignon cells
alkaline-manganese per IEC LR6

Service Life

| Measuring Function with 2.5 Ah alkaline-manganese cells | Power Consumption in mA ¹⁾ | Service Life in Hours |
|---|---------------------------------------|-----------------------|
| V DC, mA DC, °C/°F | 100 | 16 ²⁾ |
| V (AC + DC), mA (AC + DC) | 105 | 15 ²⁾ |
| Transmission mode, sampling rate: 100 ms | | |
| 9600 baud | 114 | |
| 19200 baud | 108 | |

¹⁾ in the case of new batteries consumption rises with decreasing battery voltage.
²⁾ in the case of intermittent operation

Battery Test Automatic display of the “+” symbol when battery voltage falls to below approx. 2.3 V

Battery Saver Circuit

The instrument is shut down automatically if the measurement value remains unchanged for approximately 10 minutes, and if none of the operating elements have been activated during this time. Automatic shut-down can be disabled.

Fuses

All current measuring ranges are protected by an internal 250 mA fuse. A defective fuse may only be replaced by GMC-I Service GmbH. Voltage at the measuring current circuit may not exceed 600 V_{eff}.

Electrical Safety

Protection Class II per IEC/EN 61010-1:2001
/VDE 0411-1:2002

Measuring Category II

Operating Voltage 600 V

Contamination Level 2

Test Voltage 3,7 kV~ per IEC/EN 61010-1:2001
/VDE 0411-1:2002

Electromagnetic Compatibility (EMC)

Interference emission EN 61326:2006 class B

Interference immunity EN 61326-1: 2006
EN 61326-2-1: 2006

Ambient Conditions

Operating Temp. – 5 °C ... +50 °C

Storage Temperature –25 °C ... +70 °C (without batteries)

Relative Humidity max. 75%, no condensation allowed

Elevation to 2000 m

Deployment indoors; outdoors only within the specified ambient conditions

Warm-Up Time 5 min.

Mechanical Design

Protection instrument: IP 50, terminals: IP 20
Extract from table on the meaning of IP codes

| IP XY (1 st digit X) | Protection against foreign object entry | IP XY (2 nd digit Y) | Protection against the penetration of water |
|---------------------------------|---|---------------------------------|---|
| 5 | dust protected | 0 | not protected |
| 2 | ≥ 12.5 mm Ø | 0 | not protected |

Dimensions 84 mm x 195 mm x 35 mm

Weight approx. 350 gr. with batteries

Data Interface

Type optical, via infrared light through the housing

Datenübertragung serial, bidirectional (not IrDa compatible)

Protokoll device specific

Baudrate 9600 baud

Funktionen – select/query measuring functions and parameters
– query/transmit current measurement data
– read out stored measurement data

BD232 or USB-HIT plug-in interface adapters (see Accessories) allow for adaptation to common computer interfaces, namely RS232C or USB.

Applicable Regulations and Standards

| | |
|--|--|
| IEC 61010-1 DIN EN 61010-1 VDE 0411 Part 1 | Safety requirements for electrical equipment for measurement, control and laboratory use Part 1: General requirements |
| DIN EN 61326-1 VDE 0843-20-1 | Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements |
| EN 60529 VDE 0470-1 | Test instruments and test procedures Protection provided by enclosures (IP code) |

Standard Equipment

- multimeter
- GH18 protective rubber cover for rugged use
- KS17 cable set
- batteries
- operating instructions
- DAkKS calibration certificate

Guarantee

3 years material and workmanship.
1 year to 3 years for calibration (depending upon use).

METRAHIT 30M Precision Digital Multimeter

Accessories for Operation with PCs

BD232 Interface Adapter

With the help of the bidirectional adapter BD232 METRAHIT 30M multimeters can be configured via PC and the live measurement data can be transmitted to the computer. The adapter has no memory of its own, but can be used to read out data from the memory at the METRAHIT 30M. Up to 6 adapters can be cascaded for the creation of a multi-channel measuring system.



USB-HIT Interface Adapter

This adapter is functionally identical to the BD232 interface adapter, although bidirectional transmission takes place between the IR and the USB interface in this case.

It is not possible to set up a multi-channel system with this adapter.



METRAwin10/METRAHit Software

METRAwin10/METRAHit PC software is a multilingual, measurement data logging program for recording, visualizing, evaluating and documenting measured values from METRA HIT multimeters.

Communications between the PC and the measuring instrument(s) is established via available interfaces and memory adapters. Telephone modems can be interconnected as well. Depending upon device type, one or several of the following operating modes are possible:


- **Device Configuration**
Remote configuration and querying of device-specific functions and parameters, for example measuring function, measuring range and memory parameters. Frequently used device settings can be saved to configuration files for easy recall.
- **Online Recording of Measurement Data**
Read-in, display and recording of momentarily measured data from the interconnected device
 - Number of measuring channels Up to 10
 - Start recording Manual, triggered by measured value, time triggered
 - Recording mode
 - > Time controlled with sampling interval of 0.05 s* ... 1 s ... 60 min.
 - > Manually controlled
 - > Measured value controlled in the event of exceeded limit/delta value
 - Recording duration: max. 10 million intervals

* Depending upon device type, measuring function, number of measuring channels and communication mode (e.g. via modem), sampling intervals of less than 1 s cannot be used.


- **Reading Out and Visualizing Stored Data**
If supported by the device: read-in and display of offline data recorded to device memory.

For purposes of analysis, data recorded online or read in from the device's memory can be displayed in various formats:


**Y(t) Recorder Display
for Up To 6 Channels**




**XY- Recorder Display
for Up To 4 Channels**



**Multimeter Display
for Up To 4 Channels**



**Tabular Display
for Up To 10 Channels**



System Requirements

METRAwin 10 (version 6.0) can be run on IBM compatible PCs with Microsoft Windows XP, VISTA and 7.

METRAHIT 30M

Precision Digital Multimeter


Cordura Belt Pouch HitBag

for multimeters of the METRA HIT (with/without protective rubber cover) and METRAport series




Hard Case HC20

for multimeters (with/without protective rubber cover GH18) and accessories

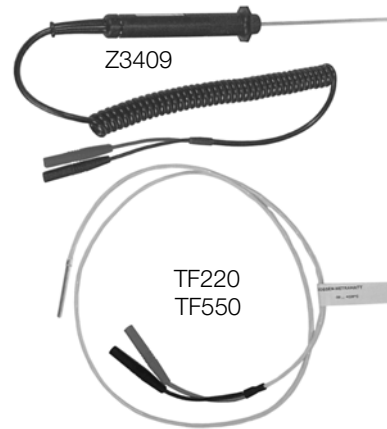

F836 Ever-Ready Case

for multimeter (without protective rubber cover) and accessories

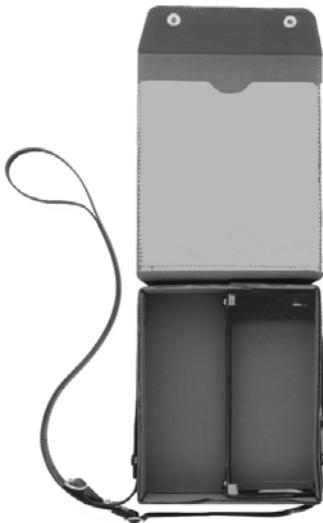

F829 Carrying Pouch

For multimeter (with or without GH18 protective cover) and accessories



Milliohm Measurement with Type KC4 Kelvin Clips

Kelvin clips are suitable for establishing contact between the METRAHIT 30M and low-resistance devices under test. They compensate for influence resulting from cable and contact resistance. The KC4 set includes two clips with insulated, twist-resistant jaws and good clamping action. They can be used for establishing contact with very fine wires, up to rails and rods with a maximum diameter of 15 mm.

4-pole connection is highly advisable for the measurement of values of less than 30 Ω .




Milliohm Measurement with Type KC27 Kelvin Probe

Same usage as KC4, but with two 2 spring-loaded steel tips for piercing insulation coatings (e.g. on the outer skin of aircraft) and oxide layers (e.g. at oxidized battery contacts), in order to assure good contact for milliohm measurements, as well as for current and voltage measurements.



Temperature Measurement with TF220

The TF220 is just one of many temperature sensors which can be selected from a wide ranging product spectrum. For further information regarding temperature sensors, as well as other accessories, please refer to our "Measuring Instruments and Testers" catalog or visit www.gossenmetrawatt.com

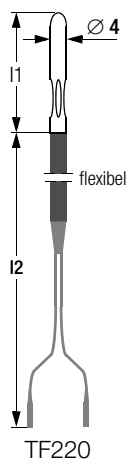

For further accessories please refer to the "Order Information" table on page 7.

METRAHIT 30M

Precision Digital Multimeter

Order Information

| Designation | Type | Article Number |
|--|--------------|-----------------|
| Precision Digital Multimeter, See page 4 for standard equipment. | METRAHIT 30M | M230B |
| 90 ... 250 V AC/5 V DC mains power pack | NA HIT 2X | Z218H |
| Accessories for Operation with PCs | | |
| Single channel pack consisting of: BD232 bidirectional interface adapter, cable, METRAwin10/METRAHit soft- ware | BD-Pack 1 | Z215A |
| Bidirectional interface adapter | BD232 | GTZ3242100R0001 |
| RS 232 interface cable, 2 m long | Z3241 | GTZ3241000R0001 |
| METRAwin10/METRAHit software update | Z3240 | GTZ3240000R0001 |
| Bidirectional interface adapter IR/USB for METRA HITs | USB-HIT | Z216A |
| Accessories for Voltage Measurement | | |
| Probe for voltage measurements in power installations of up to 1000 V | KS30 | GTZ3204000R0001 |
| Accessories for Current Measurement | | |
| Current sensors, current transformers and shunts see table on the next page | | |
| Accessories for Temperature Measurement | | |
| Pt100 temperature sensor for surface and immersion measurements from -40 to +600° C | Z3409 | GTZ3409000R0001 |
| Pt1000 temperature sensor, from -20 to +220 °C for measurements in household appliances in gases and liquids, stainless steel immersion tube dia. 3.2 mm | TF220 | Z102A |
| Pt100 oven sensor, -50 to +550° C | TF550 | GTZ3408000R0001 |
| 10 ea. Pt100 adhesive temperature sensor for -50 to +550° C | TS-Chipset | GTZ3406000R0001 |
| Accessories for Low Voltage Measurement | | |
| Kelvin clips (1 set) for 4-pole connec- tion of low-resistance DUTs, cable length: 120 cm | KC4 | Z227A |
| Kelvin probes (1 set) with double steel tips for 4-pole connection of low-resis- tance DUTs | KC27 | Z227B |
| Cable set with 2 mm diameter steel tips and 120 cm cable, 1000 V / CAT II | KS17-S | Z110H |

| Designation | Type | Article Number |
|---|--------|-----------------|
| Accessories for Transport | | |
| Imitation leather carrying pouch for METRA HIT and METRAmax | F829 | GTZ3301000R0003 |
| Cordura belt pouch for multimeters of the METRA HIT and METRAport series | HitBag | Z115A |
| Imitation leather ever-ready case with cable compartment | F836 | GTZ3302000R0001 |
| Ever-ready case for 2 METRA HITs, 2 adapters and accessories | F840 | GTZ3302001R0001 |
| Hard case for one METRA HIT and accessories | HC20 | Z113A |
| Hard case for für two METRA HITs and accessories | HC30 | Z113B |

^{D)} Data sheet available

METRAHIT 30M

Precision Digital Multimeter

| Current Measuring Accessories | | | | | | | | | Suitable for METRA HIT 30M |
|--|--|--|--------------------------------|--------------------------|-------------------------------------|-------------------------------------|--|------------------|----------------------------|
| Type | Designation | Measuring Range | Meas. Category | Max. Wire Dia. | Transformation Factor | Frequency Range | Intrinsic Uncertainty \pm (% rdg. + ...) | Article Number | |
| All current sensors and transformers are equipped with a connector cable (1.2 to 1.5 m long) with 4 mm safety banana plugs | | | | | | | | | |
| DC/AC Current Sensors with Voltage Output | | | | | | | | | |
| CP30 | DC/AC clip-on current sensor, with battery mode (30 h) | 5 mA ... 30 A | 300 V / CAT III | 25 mm | 100 mV/A | DC...20 kHz (-1dB) | 1 % +2 mA | Z201B | I |
| CP330 | DC/AC clip-on current sensor, with 2 measuring ranges, battery mode (30 h) | 0,5 ... 30 A 5 ... 300 A | 300 V / CAT III | 25 mm | 10 mV/A; 1 mV/A | DC...20 kHz (-3 dB) | 1 % + 50 mA 1 % + 100 mA | Z202B | I |
| CP1100 | DC/AC clip-on current sensor, with 2 measuring ranges, battery mode (30 h) | 0,5 ... 100 A 5 ... 1000 A | 300 V / CAT III | 32 mm | 10 mV/A; 1 mV/A | DC...20 kHz (-1dB) | 1 % + 100 mA 1 % + 500 mA | Z203B | I |
| Z13B | DC/AC clip-on current sensor, with 2 measuring ranges, battery mode (50 h) | 0.2 ... 40 A~/60 A-; 0.5 ... 400 A~/ 600A- | 300 V / CAT IV | 50 mm | 10 mV/A, 1 mV/A | <u>DC...65 Hz</u> ... 10 kHz | 1,5 % 2,0 % | Z213B | I |
| AC Current Sensors with Voltage Output | | | | | | | | | |
| WZ12B | AC clip-on current sensor | 10 mA~ ... 100 A~ | 300 V / CAT III | 15 mm | 100 mV/A | <u>45 ... 65</u> ... 500 Hz | 1.5% +0.1 mA | Z219B | I |
| WZ12C | AC clip-on current sensor, with 2 measuring ranges | 1 mA~ ... 15 A~, 1 ... 150 A~ | 300 V / CAT III | 15 mm | 1 mV/mA, 1 mV/A | <u>45 ... 65</u> ... 400 Hz | 3% + 0.15 mA, 2% + 0.1 A | Z219C | I |
| WZ11B | AC clip-on current sensor, with 2 measuring ranges | 0.5 ... 20 A~, 5 ... 200 A~ | 600 V / CAT III | 20 mm | 100 mV/A, 10 mV/A | <u>30...48 ... 65</u> ... 500 Hz | 1 ... 3% | Z208B | I |
| Z3512A | AC clip-on current sensor, with 4 measuring ranges | 1 mA ... 1/10/100/ 1000 A~ | 600 V / CAT III | 52 mm | 1 V/A, 100 mV/A, 10 mV/A, 1 mV/A | <u>10...48 ... 65</u> ... 3 kHz | 0.5 ... 3%, 0.2 ... 1% | Z225A | I |
| METRAFLEX 3000 | Flexible AC current sensor with 3 measuring ranges, battery mode (2000 h) | 0,5 ... 30 A, 0,5 ... 300 A, 5 ... 3000 A | 1000 V CAT III 600 V CAT IV | Circumference: 610 mm | 100 mV/A, 10 mV/A, 1 mV/A | 10 Hz ... 20 kHz | 1% + 0.1 A 1% + 0.1 A 1% + 1 A | Z207E | I |
| METRAFLEX 300M | Flexible AC miniature current sensor with 3 measuring ranges, battery mode (150 h) | 1 ... 3 A, 1 ... 30 A, 5 ... 300 A | 1000 V CAT III 600 V CAT IV | Circumference: 160 mm | 1 V/A, 100 mV/A, 10 mV/A | 20 Hz ... 100 kHz | 1% + 0.2 A 1% + 0.2 A 1% + 1 A | Z207M | I |
| AC Current Transformer with Current Output | | | | | | | | | |
| WZ12A | AC clip-on current transformer | 15 ... 180 A~ | 300 V / CAT III | 15 mm | 1 mA/A | <u>45 ... 65</u> ... 400 Hz | 3% | Z219A | — |
| WZ12D | AC clip-on current transformer | 30 mA ... 150 A~ | 300 V / CAT III | 15 mm | 1 mA/A | <u>45 ... 65</u> ... 500 Hz | 2.5% +0.1 mA | Z219D | n |
| WZ11A | AC clip-on current transformer | 1 ... 200 A~ | 600 V / CAT III | 20 mm | 1 mA/A | <u>48 ... 65</u> ... 400 Hz | 1 ... 3% | Z208A | — |
| Z3511 | AC clip-on current transformer | 4 ... 500 A~ | 600 V / CAT III | 30 x 63 mm | 1 mA/A | <u>48 ... 65</u> ... 1 kHz | 3% +0.4 A | GTZ3511 000R0001 | — |
| Z3512 | AC clip-on current transformer | 0.5 ... 1000 A~ | 600 V / CAT III | 52 mm | 1 mA/A | <u>30...48 ... 65</u> ... 5 kHz | 0.5% ... 0.7% | GTZ3512 000R0001 | — |
| Z3514 | AC clip-on current transformer | 1 ... 2000 A ~ | 600 V / CAT III | 64 x 150 mm | 1 mA/A | <u>30...48 ... 65</u> ... 5 kHz | 0.5% +0.1 A | GTZ3514 000R0001 | — |
| Shunt Resistors for Multimeters without Current Measuring Function | | | | | | | | | |
| NW300mA | Plug-in shunt resistor, encapsulated 1 Ω | 0 ... 300 mA | 300 V / CAT III | — | 1 mV/mA | DC ...10 kHz | 0.5% | Z205C | I |
| NW3A | Plug-in shunt resistor, encapsulated 0,1 Ω | 0 ... 3 A | 300 V / CAT III | — | 100 mV/A | DC ...10 kHz | 0.5% | Z205B | I |

I without limitation n up to 120 A~



 GOSSEN METRAWATT

Contact:
Industrial Process Measurement, Inc.
3910 Park Avenue, Unit 7
Edison, NJ 08820
732-632-6400
support@instrumentation2000.com
<http://www.instrumentation2000.com>