

Air Flow Switch for Ducts



measuring
•
monitoring
•
analyzing

LPS



- Adjustable Switch Point
- Micro Switch Rated to 15 Amps
- Vertical or Horizontal Installation



Contact:
Industrial Process Measurement, Inc.
3910 Park Avenue, Unit 7
Edison, NJ 08820
732-632-6400
support@instrumentation2000.com
<http://www.instrumentation2000.com>



Description

KOBOLD LPS air flow switches are widely used to control flow setpoints in HVAC applications. In addition to being rugged, they have the added benefit of being inexpensive. The principle of operation is quite simple. Air flow exerts a force on a paddle, actuating a dust-tight microswitch. The switching point may be adjusted continuously within a wide range, making the LPS useful for a large variety of applications.

The instrument is factory set to switch at 195 FPM. To handle air velocities of more than 920 FPM, the paddle may be cut at a precalibrated mark. This automatically changes the factory set point to 490 FPM.



Specifications



Maximum Air Temperature: 185 °F

Installation: Universal. The arrow must point in flow direction. Vertical installation requires re-adjustment of the switching point to compensate for paddle weight.

Micro Switch: SPDT, 15A, 2000 VA, 250V_{AC}

Materials
 Paddle: 321 SS
 Lever: Brass

Dimensions

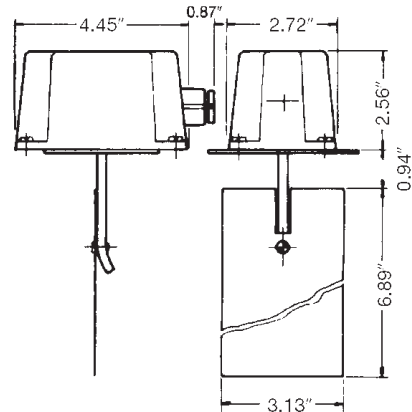

Adjustable Velocity Range FPM				Order Number
Switching-off		Switching-on		
Min.	Max.	Min.	Max.	
195	1575	395	1810	LPS-1100P