


Digital Megohmmeter

1000V digital tester
With automatic 3 minute test

Features:

- Three test voltages of 250V, 500V and 1000V
- Insulation Resistance to 2000M Ω
- Safety Power Lock enables "hands free" operation for 3 minute test
- Automatic discharge when safety "Press to Test" button is released
- Auto power off and Data Hold
- Large 0.65" (17mm) LCD display
- Full function indication
- Overload protection
- Automatic zero adjustment
- Fast response for both continuity and low resistance testing
- Continuity measurements to 200 Ω and Voltage to 600VAC
- Optional 380399 Resistance Checker to check the performance of your Megohmmeter
- Complete with 6 x AA batteries, heavy duty 2.5ft (0.8m) test leads, alligator clip, large probe, and case with neckstrap

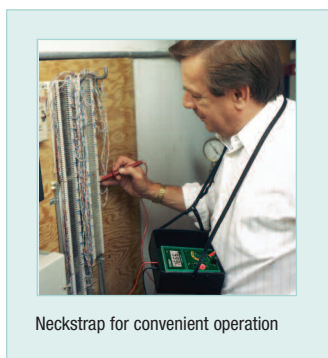

Neckstrap for convenient operation

Specifications	Range	Basic Accuracy
Insulation Voltage	250V, 500V, 1000V	
Insulation resistance(basic accuracy)	200M/2000M Ω	<1000M Ω (3%rdg+5d), >1000M Ω (5%rdg+5d)
AC Voltage (accuracy)	600V	(0.8%rdg+3d)
Low Resistance	200 Ω	(1%rdg)
Output short circuit current	1.5 mA 0.3-0.5 mA	
Ohmmeter (accuracy)	20/200 Ω (auto)	(1%rdg+2d)
Overload Protection	2200V (<1 min)	
Continuity Beeper	<100 Ω	
Dimensions	3.8 x 6.3 x 2.3" (97 x 160 x 58mm)	
Weight	13oz (369g)	

Ordering Information:

380360.....Digital Megohmmeter
380360-NIST380360 with Calibration Traceable to NIST

Contact:
Industrial Process Measurement, Inc.
3910 Park Avenue, Unit 7
Edison, NJ 08820
732-632-6400
support@instrumentation2000.com
<http://www.instrumentation2000.com>



<http://www.instrumentation2000.com>